

UNI Slide cabinets



QUALITY STANDARD

- LST EN 14073-1:2004
- LST EN 14073-2:2004
- LST EN 14073-3:2004

TECHNICAL INFORMATION

Carcass and shelves

- Made of 18 mm MFC (melamine) with 1 mm ABS edging;
- Height adjustable shelves;
- Shelves load capacity – 25 kg.

Doors

- Made of 18 mm MFC (melamine) with 1 mm ABS edging.

Handles

- Metal profile 60 mm, length matches the door height;
- Powder coated metal.



EY

MY

T1Y

AY

Handle type (colour + handle code)

Plinth

- Made of 18 mm MFC (melamine);
- Plastic feet with height levelling (+10 mm).

Metal legs

- Metal tube - 40x40 mm;
- Plastic feet with height levelling (+10 mm);
- Powder coated metal.

Plastic legs

- Plastic height levelling feet;
- H=23 mm +10 mm;
- Black colour.

Castors

- Four twin wheel castors, Ø80 mm;
- Two out of four with stopper brakes;
- The load capacity: 100 kg per castor.


MATERIALS

- Melamine (combinations available): P (birch), T (beech), D1 (whitened oak), D2 (amber oak), U (walnut), M1 (white), N (grey), N1 (dark grey);
- Metal: E (white), M (metallic), T1 (dark grey), A (black).

GUARANTEE


- 5 years

RANGE

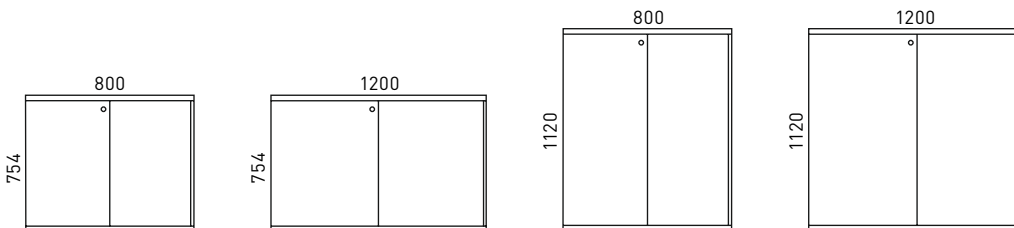

ORDERING EXAMPLE

Code structure



X3S082 - PP M1 MY

Product

Melamine

Handle colour and type

Must be ordered (one of the following)



Plinth



Metal legs



Plastic legs



Castors